


NOTES

1. PG=PROFILE GRADE
2. CROSS SLOPE OF THE ROADWAY SHALL BE 2%.
3. SIDEWALK SHALL BE LOCATED 6 FEET FROM THE BACK OF THE CURB ON BOTH SIDES OF THE ROADWAY PER STANDARD DRAWING DCED-R2300.
4. GRADING BEHIND THE CURB TO THE RIGHT OF WAY SHALL BE 2%.
5. FOR CURB DETAILS SEE STANDARD DRAWING DCED-R2010.

CHRIS E. BAUSERMAN, P.E., P.S.
 Delaware County Engineer

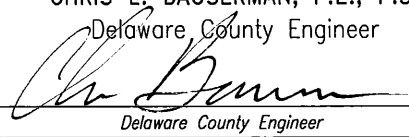

Delaware County Engineer

STANDARD CONSTRUCTION DRAWING
 TYPICAL LOOP STREET
 SECTION AT EBBROW

DELAWARE COUNTY ENGINEER'S OFFICE
 50 Channing Street
 Delaware, Ohio 43015
 PHONE: (740)833-2400 FAX: (740)833-2399
 www.co.delaware.oh.us

APPROVED
 1-22-2008

REVISED

Drawn MFR sheet 2
 Checked MAS of 2

FILE NO.
 DCED-R102B