

NOTES:


"A" MINIMUM OFFSETS SHALL BE 5 FEET FROM THE BACK OF CURB OR THE EDGE OF PAVEMENT.

"B" MINIMUM DEPTH FROM TOP OF CONDUIT OR CASING TO TOP OF PAVEMENT FOR ALL STREETS IS 48". MINIMUM DEPTH OF 12" BELOW THE UNDERDRAIN IS REQUIRED FOR ALL STREETS.

"C" IF AGGREGATE DRAINS ARE DISTURBED, THEY MUST BE REPLACED.

TYPICAL LOCATION FOR CURBED STREETS

TYPICAL LOCATION FOR NON-CURBED STREETS

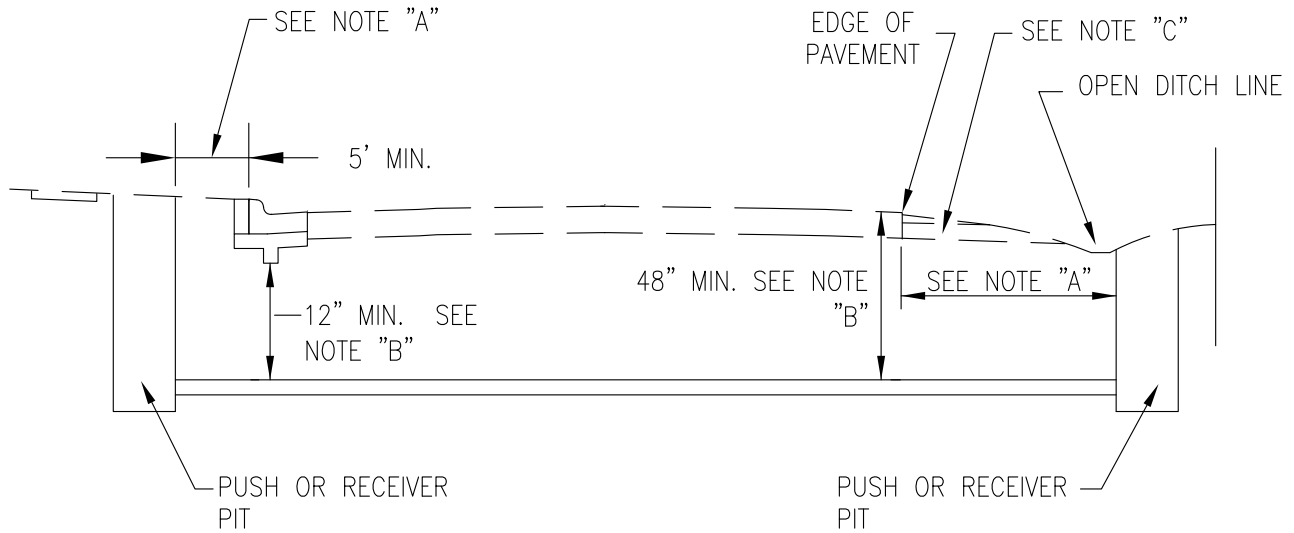

CHRIS E. BAUSERMAN, P.E., P.S.
Delaware County Engineer

STANDARD CONSTRUCTION DRAWING

DELAWARE COUNTY ENGINEER'S OFFICE
50 Channing Street
Delaware, Ohio 43015
PHONE: (740)833-2400 FAX: (740)833-2399
www.co.delaware.oh.us

TYP. UTILITY BORE
REQUIREMENTS

Delaware County Engineer

APPROVED
1-22-2008

REVISED
1-04-2010

Drawn KS
Checked EM

sheet 2
of 2

FILE NO.
DCED-R2166B