


SECTION

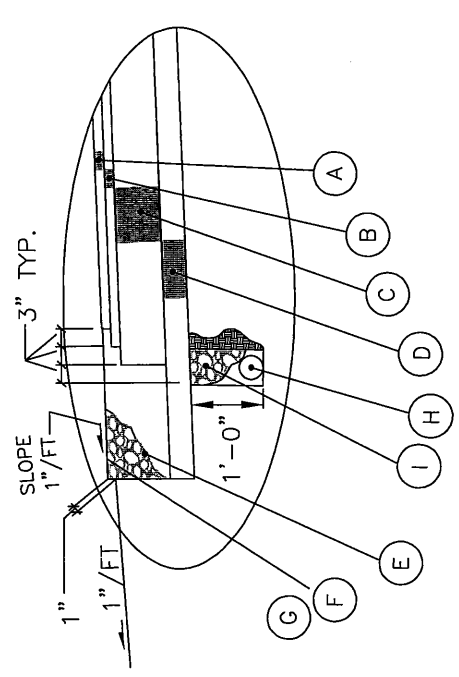

DETAIL A

- LEGEND**
- A. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, ITEM 404
  - B. 1-1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, ITEM 402
  - C. 7-1/2" BITUMINOUS AGGREGATE BASE, ITEM 301
  - D. 4" CRUSHED AGGREGATE BASE, ITEM 304
  - E. CRUSHED AGGREGATE BERM, ITEM 304 (SEE NOTE 1 BELOW).
  - F. BITUMINOUS PRIME COAT, ITEM 408, 702.02 RC-250, MC-30, MC-70 OR MC 250 (APPLIED AT 0.40 GAL. PER SQ. YD.)
  - G. SEAL COAT, ITEM 409, 702.02, RC-250, RC-800, MC-800, MC-3000, 702.03, CBAE-800 OR 702.04, RS-1, RS-2, CRS-1, CRS-2 (USING 0.30 GAL. BITUMINOUS MATERIAL PER SQ. YD.) AND .008 CU.YD. COVER AGGREGATE PER SQ. YD.
  - H. 4" PIPE UNDERDRAIN, ITEM 605
  - I. NO.8 OR NO. 57 AGGREGATE
  - J. SEEDING AND MULCHING, ITEM 659
- NOTES:**
- \* A 5' DRAINAGE AND UTILITY EASEMENT IS REQUIRED FOR PORTION OF REMAINING DITCH BACKSLOPE OUTSIDE OF R/W.
- VERIFY WITH TOWNSHIP WHETHER TO PROVIDE REINFORCED SHOULDER PER STANDARD DRAWING DCED-R2137.  
THE MINIMUM DITCH DEPTH SHALL BE 1.5'.

200' ENTRANCE STREET LENGTH  
(INCLUDING 50' DIVERGENT TAPER)

<p>CHRIS E. BAUSERMAN, P.E., P.S. Delaware County Engineer</p> <p>Delaware County Engineer</p>	<p>STANDARD CONSTRUCTION DRAWING MINOR RURAL COLLECTOR STREET ENTRANCE SECTION AND DETAIL</p> <p>36' EP/EP</p> <p>1500 VPD&lt;ADT&lt;3500 VPD</p>	<p>DELAWARE COUNTY ENGINEER'S OFFICE 50 Channing Street Delaware, Ohio 43015 PHONE: (740)833-2400 FAX: (740)833-2399 www.co.delaware.oh.us</p>								
<p>APPROVED 1-04-2010</p>	<p>REVISED</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Drawn</td> <td style="width: 33%;">MR</td> <td style="width: 33%;">sheet</td> <td style="width: 33%;">1</td> </tr> <tr> <td>Checked</td> <td>EM</td> <td>of</td> <td>1</td> </tr> </table>	Drawn	MR	sheet	1	Checked	EM	of	1
Drawn	MR	sheet	1							
Checked	EM	of	1							
		<p>FILE NO. DCED-R2135E</p>								